


# M160/250 A Positive position

# Münker


## METALLPROFILE

Gewerbeparkstrasse 19 · 51580 Reichshof-Wehrath  
Tel. +49-2265-9986-0 · Fax +49-2265-9986-800  
Mail info@muenker.com · Internet www.muenker.com

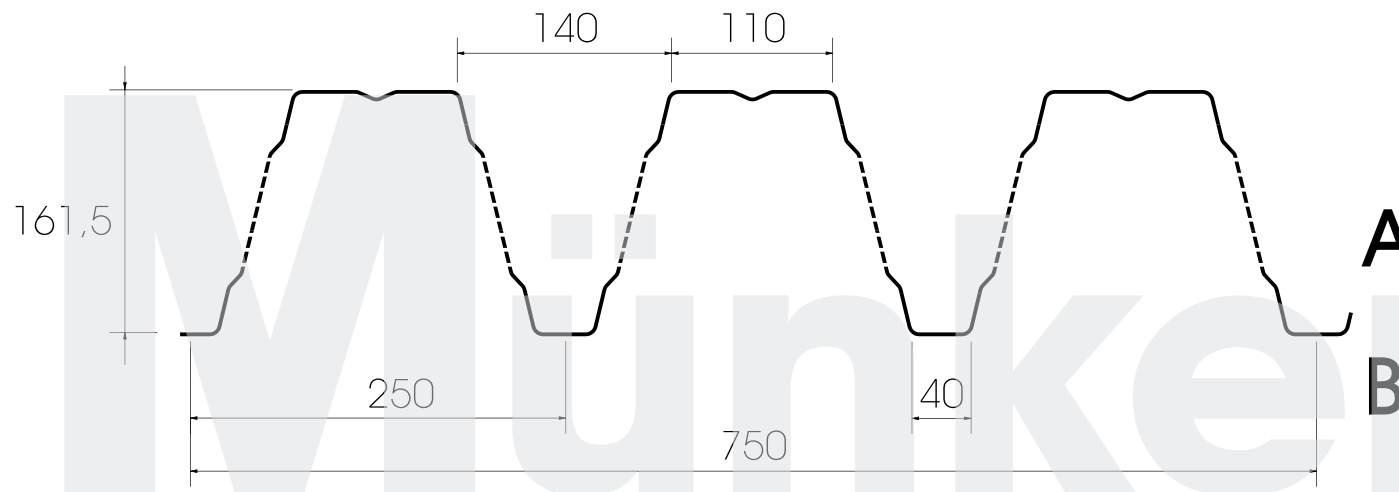

### Details

Proportion perforated 15,10%/m<sup>2</sup>  
Web perforation, RV 5-9

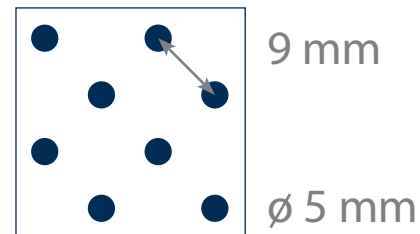

Material strength	Weight
0,75 mm	0,107 kN/m <sup>2</sup>
0,88 mm	0,126 kN/m <sup>2</sup>
1,00 mm	0,143 kN/m <sup>2</sup>
1,13 mm	0,162 kN/m <sup>2</sup>
1,25 mm	0,179 kN/m <sup>2</sup>
1,50 mm	0,214 kN/m <sup>2</sup>

Radiuses: 6 mm

Last updated: 09/2013

## Use as a warm roof

The side marked B is turned to face the room interior.